




plimat

TÉ 90° RÉDUIT femelle à coller

REDUCING TEE 90° - TE 90° REDUCIDA

PRODUITS ET DIAMÈTRES DISPONIBLES

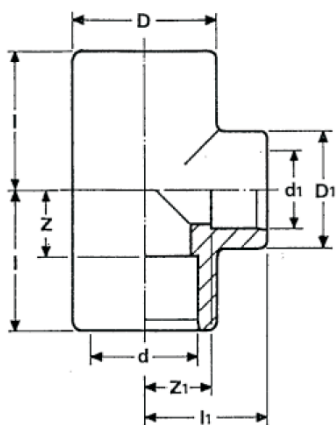

Référence	d	d1	D	D1	l	l1	Z	Z1	Gr
TR2520	25	20	30	25	33	30	13	13	28
TR3220	32	20	38	25	39	34	16	17	42
TR3225	32	25	38	31	39	37	16	17	45
TR4020	40	20	47	25	49	38	22	22	72
TR4025	40	25	47	31	49	41	22	22	74
TR4032	40	32	47	38	49	43	22	21	74
TR5020	50	20	62	28	59	44	28	28	183
TR5025	50	25	62	34	59	47	28	28	186
TR5032	50	32	62	42	59	50	28	28	190
TR5040	50	40	62	50	59	54	28	28	190
TR6320	63	20	-	75	-	72	-	-	368
TR6325	63	25	-	75	-	72	-	-	372
TR6332	63	32	-	75	-	72	-	-	362
TR6340	63	40	-	75	-	72	-	-	365
TR6350	63	50	77	65	72	65	34	34	356
TR7532	75	32	-	90	-	84	-	-	560
TR7540	75	40	-	90	-	84	-	-	660
TR7550	75	50	92	61	84	71	40	40	527
TR7563	75	63	92	77	84	78	40	40	548
TR9040	90	40	-	110	-	99	-	-	1167
TR9050	90	50	109	65	99	83	48	48	865
TR9063	90	63	109	77	99	86	48	48	865
TR9075	90	75	109	92	99	92	48	48	881
TR11032	110	32	-	-	117	88,5	56	66,5	1440
TR11040	110	40	-	-	117	98	56	72	1511
TR11050	110	50	132	65	119	96	58	65	1417
TR11063	110	63	132	77	119	96	58	58	1426
TR11075	110	75	132	92	119	102	58	58	1451
TR11090	110	90	132	109	119	109	58	58	1522
TR12550	125	50	-	-	133	106	64	75	2170
TR12563	125	63	-	148	-	132	-	-	2353
TR12575	125	75	-	148	-	132	-	-	2380
TR12590	125	90	-	148	-	132	-	-	2430
TR125110	125	110	-	148	-	132	-	-	2158




plimat

TÉ 90° RÉDUIT femelle à coller

REDUCING TEE 90° - TE 90° REDUCIDA

PRODUITS ET DIAMÈTRES DISPONIBLES

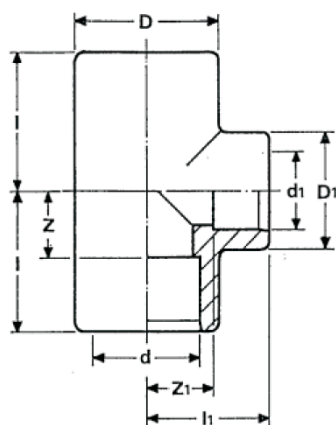

Référence	d	d1	D	D1	l	l1	Z	Z1	Gr
TR14050	140	50	-	-	147,5	113	71,5	82	2968
TR14075	140	75	-	163	-	146	-	-	2323
TR14090	140	90	-	163	-	146	-	-	3189
TR140110	140	110	-	163	-	146	-	-	3093
TR140125	140	125	-	163	-	146	-	-	3120
TR16075	160	75	-	-	167	142	81	98	4506
TR16090	160	90	-	180	-	166	-	-	3598
TR160110	160	110	-	180	-	166	-	-	3369
TR160125	160	125	-	180	-	166	-	-	3400
TR160140	160	140	-	180	-	166	-	-	3550
TR200110	200	110	226	131	204	174	143	-	5990
TR200160	200	160	-	223	-	206	-	-	6120
TR22590	225	90	258	112	177,5	165	58	114	6550
TR225110	225	110	258	135	177,5	177	58	114	6600
TR225160	225	160	258	193	203,5	203	84	115	8300
TR250110	250	110	284	134	192	191	61	128	8300
TR250160	250	160	284	189	217	216	86	129	9900
TR250200	250	200	284	228	264	238	133	132	12100
TR31590	315	90	355	112	226	209	62	158	14300
TR315110	315	110	355	135	226	220	62	158	14350
TR315160	315	160	355	193	229	247	83	161	15150
TR315200	315	200	355	228	266	285	102	179	16600
TR315225	315	225	355	320	281	280,5	117	162	17500
TR315250	315	250	355	285	291	291	127	160	18300